



LCD MODULE

已确认此版本所有图纸


签名:

日期:

VERSION: C

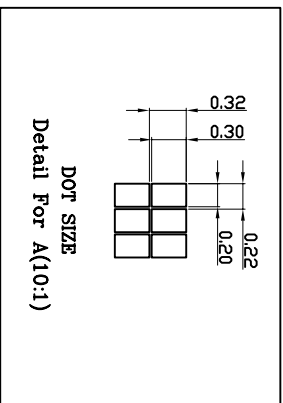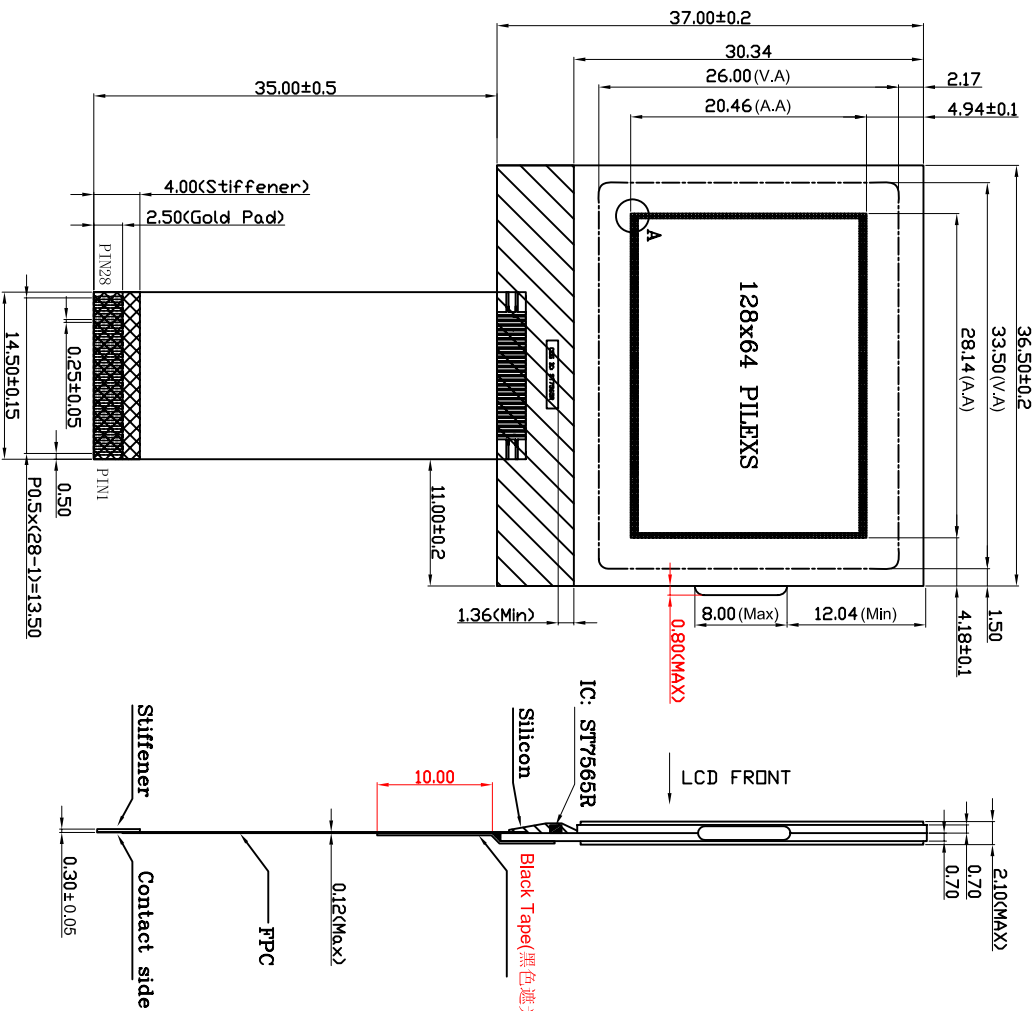

LCD LOGIC

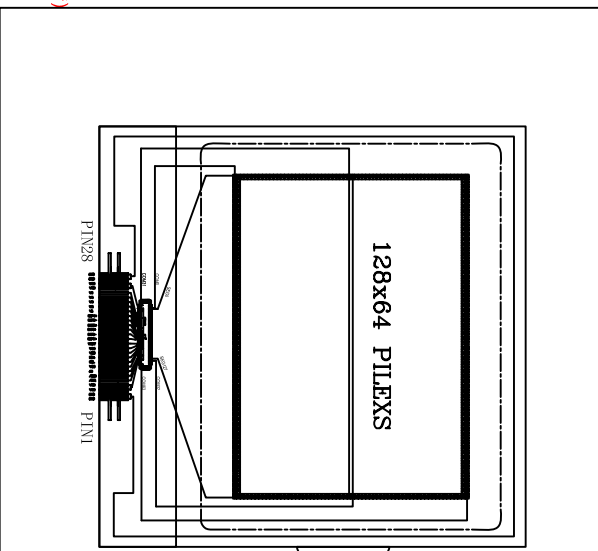

Interface Description:

PIN	SYMBOL	PIN	SYMBOL
1	ESD	21	V2
2	ESD	22	V3
3	VSS	23	V4
4	VSS	24	V0
5	/CS1	25	VSS
6	/RES	26	VSS
7	A0	27	ESD
8	VDD(+3.3V)	28	ESD
9	SCL		
10	SDA		
11	VDD		
12	VSS		
13	VOUT		
14	C3+		
15	C1-		
16	C1+		
17	C2+		
18	C2-		
19	C4+		
20	V1		



E			1.DISPLAY TYPE:	FSTN, 正显, 半透	7.STORAGE TEMP:	-25°C~80°C	APPROVE	XIAMEN ARROWTECH ELECTRONICS CO., LTD.	
D			2.VIEWING DIRECTION:	6.0°CLOCK	8.LCD CONTROLLER	ST7565R	MICROLCD		
C	Change Black tape size	2008.12.12	3. POLARIZER MODE:	TRANSFLECTIVE	NOTE:		CHECKED	UNT ^{mm}	CUSTOMER NO.
B	Redefined Interface	2008.08.29	4.DRIVE METHOD:	1/65DUTY 1/9 BIAS	The non-specified tolerance of dimension is ±0.2mm.		KELAN	SCALE:1:1	
A	Preliminary	2008.08.22	5.LCD DR. VOLTAGE:	10.5±0.2(V)			DRAWN	DATE	SHEET NO.
	REVISION RECORD		6.OPERATING TEMP:	-20°C~70°C		ZHAD	2008.09.04	1/1	MODEL NO. AT-Y12864-B2