


客户确认

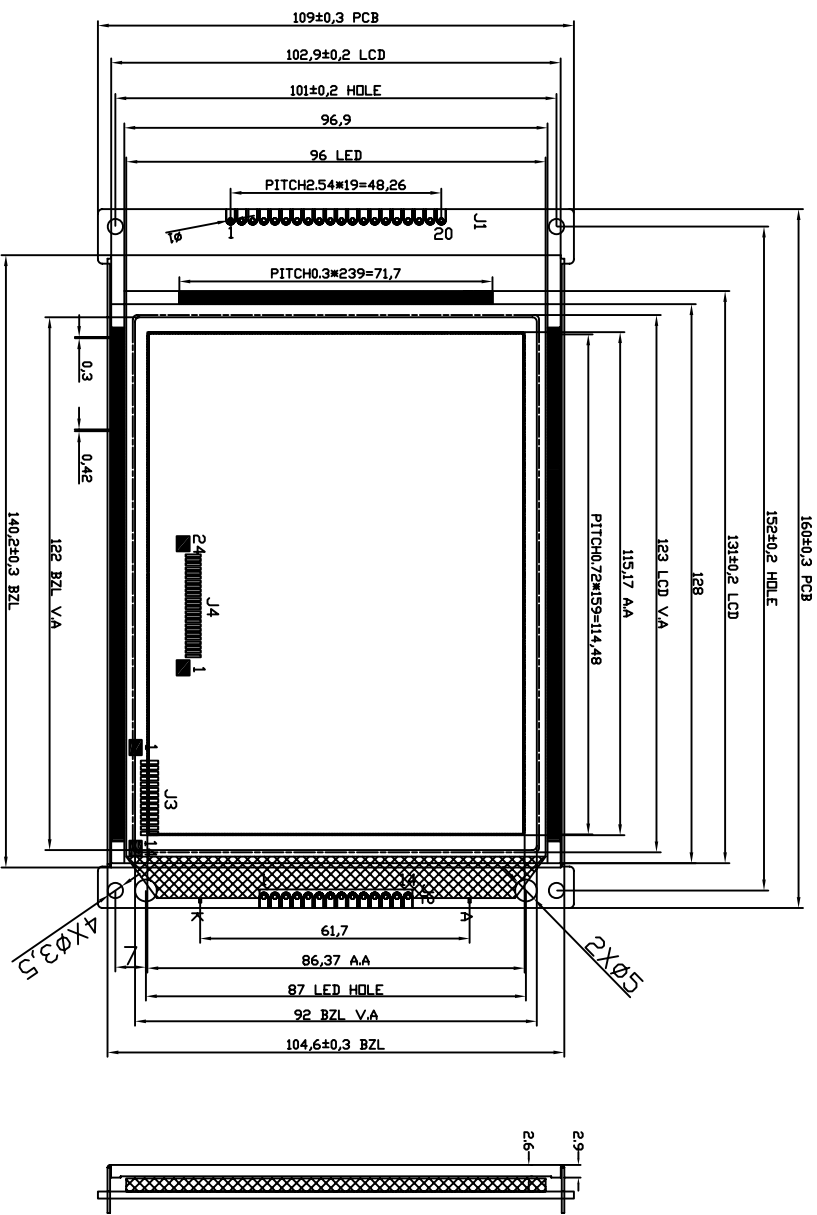

J1		J2/J3	
No.	Pin Name	No.	Pin Name
1	VSS	1~4	DO-D3
2	VDD	5	/DISP-ON/OFF
3	V0	6	PLM
4	/WR	7	M
5	/RD	8	CL1
6	/CS	9	CL2
7	A0	10	VDD
8	RST	11	VSS
9-16	DB0~7	12	VEE
17	NC/BLA	13	V0
18	VEE	14	PG/BLA
19	BLA		
20	BLK		

J4	
No.	Pin Name
1	BLK
2	BLA
3	DOUT
4	BUSY
5	DIN
6	T-CS
7	DCLK
8	VEE
9	VSS
10	VDD
11	V0
12	/WR
13	/RD
14	/CS
15	A0
16	RST
17~24	DB0~7

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2

PERFORMANCE FEATURES

LCD Display Type:	STN BLUE-NEGATIVE
Viewing Direction:	6 O'CLOCK
LCD Duty:	1/240
LCD Bias:	1/17
Backlight Color:	White
IC:	RA8835
Operating Voltage:	23.0V
Storage Temperature:	-30°C~80°C
operate Temperature:	-20°C~70°C

序号 修改记录



ARROW-TECH ELECTRONICS CO.,LTD

DRAWN BY:

CHECKED BY:

APPROVED BY:

CONFIRMED BY:

DOC: ATM320240A-NS(W)-BPM

DWG NO: SYM(B)320240B8 V2.0

DATE: 2009.12.22



SCALE

UNIT: mm

SHEET NO: 1 OF 1

BLOCK DAGRAM

